

SLIK®

Designed and engineered in Japan



PRODUCT CATALOG

SUPPORTING
THE ART OF
IMAGE-MAKING

www.slik.com/

2018.9

SLIK has been quietly designing and manufacturing high-quality tripods for more than 60 years. SLIK has won 6 prestigious Japanese Ministry of International Trade and Industry (MITI) "Good Design" (G-Mark) awards. SLIK's original and innovative designs have become industry standards.

Check out the quality and heritage of SLIK tripods, monopods and heads thru online and at your local camera stores.

1948 BIRTH OF SLIK TRIPOD

Mr. Takatoshi Shiraishi, a mechanical engineer and photography enthusiast, began designing and creating his own tripods by himself in the suburb of Tokyo, Japan when he was 23 years old.

The first brand name was "ALPS" and then, it had been changed to "SLICK" in the beginning of 1950s.



1956 INCORPORATION OF A COMPANY

Mr. Shiraishi founded SLICK Elevator Tripod Co., Ltd. and at the same time, SLICK introduced "SLICK Master" tripod for professional and press photographers especially.

1963 CHANGE OF COMPANY NAME

The company name was changed to SLICK Tripod Co., Ltd. SLICK introduced a unique multi-action head which could get any angles with one pan handle.

1967 CONSTRUCTION OF NEW HIDAKA FACTORY

The "Hidaka" factory was constructed newly in Saitama Prefecture, Japan for the mass production. SLICK "Master Deluxe" and SLICK "Goodman Ace" tripods received "Good Design Awards" (G-Mark) by The Ministry of International Trade and Industry (MITI) of Japan.

SLICK Tripod Sales Co., Ltd. was created as a separate business entity from SLICK Tripod Co., Ltd. to focus exclusively on sales of the products.

1974 NEW SLIK LOGO

The letter of "SLICK" in our company name was changed to "SLIK".

1977 MULTI-FUNCTION SYSTEM

SLIK started to sell the new model "88M" tripod, which has various functions that are commonplace today, such as the simple movement from low position to high position, lever leg locks, quick release shoe system, etc. It received "Good Design Award" (G-Mark) by The MITI of Japan in this year.

1987 SLIK AMERICA, INC.

SLIK America, Inc. was established in New York, U.S.A. for the sales in U.S. market.

1988 SLIK (THAILAND) CO., LTD

Slik (Thailand) Co., Ltd. was established and a factory constructed in the suburb of Bangkok, Thailand to meet the increasing demands for good quality inexpensive tripods without using any outside manufacturing.

The unique trigger style Ball Head "AF2100" received "Good Design Award" (G-Mark) by The MITI of Japan.

1989 SLIK CORPORATION

Slik Tripod Sales Co., Ltd. merged back into Slik Tripod Co., Ltd. and the single company was named SLIK CORPORATION.

1994 U-SERIES TRIPODS

SLIK tripod model "U 8000" (made in Thailand factory) received "Good Design Awards" (G-Mark) by The MITI of Japan.

than 60 years.

(MITI) "Good Design" (G-Mark) awards.

and at your local camera stores.

1997 NEW BALL HEAD & A.M.T. TRIPODS

SLIK "Ball Head 800" (made in Thailand factory) received "Good Design Awards" (G-Mark) by The MITI of Japan. Introduction of the new alloy of SLIK A.M.T. (Aluminum, Magnesium and Titanium) and then, started sales of our tripod model "PRO 700DX" and monopod "PRO POD 600" using this new alloy in the legs.

1999 CARBON FIBER PRODUCTS

Began the production and sales of new Carbon Fiber tripod model "PRO 803CF", "PRO 804CF" and monopod "PRO POD 380".

2001 NEW SLIK

Became a member of Kenko Co., Ltd. (now, Kenko Tokina Co., Ltd.).

2012 THE 2nd FACTORY IN THAILAND

The 2nd factory in Thailand was opened at Saraburi, Thailand after the heavy damage by large-scale flood at the original first factory at Navanakorn in 2011.

2014 SLIK BLUE

SLIK decided to make the image color of the product BLUE. Since then, SLIK BLUE has been adopted as the accent color of the product.



2016 R.F.M (Rapid Flip Mechanism)

SLIK original travel tripod; LITE series had been introduced at Photokina 2016. SLIK patented "R.F.M." eases inverting tripod legs for compact storage.

2018 TO THE NIGHTLY SKY & TIME-LAPSE

SLIK expands product range to the astronomical photography. ASTRA sky tracker is the ideal piece for not only astronomical photography but also unique time-lapse shooting.

Contents

Carbon Fiber Series	04
LiTE Series	08
Pro Series	09
HD Series	12
EZ Series	12
Sprint Series	13
U Series	14
Compact & Mini Series	14
Mémoire Series	14
Video Series	15
Heads	16
Monopods	20
Accessories	21
Specification Chart	23

Key to Symbols

	Load Capacity
	Maximum Height A: Maximum height of tripod with the tripod center column and legs fully extended. B: Maximum height of tripod with legs fully extended but the center column not raised.
	Minimum Height The lowest operational height of tripod with legs fully spread and the center column in lowest position.
	Folded Length The minimum folded length of the tripod.
	Weight
	Quick Release Type
	Shape of leg pipe / tube and diameter of the first upper leg.



Carbon Fiber Series

Head mounting screw
Corresponding to both U1/4 and U3/8 head mounting screws.

3-steps leg angle adjustment
Leg angle adjustable from a high position to a low position.

A.R.S (Anti-Rotation System)
The A.R.S. systems prevent the leg tubes from rotating inside each other making it much easier to lock and release all the twist-release locks securely.

Leg lock system (crown-type) (PAT.)
Twist lock system with double nut ring crown type (PAT.).

The hook at the bottom of the center column
Accessory hook capable of suspending a weight.

Exchangeable leg tips
Leg tips can be exchanged to spike leg tips from rubber leg tips. * SPIKE SET is sold separately as an optional.

Medume type

- Full-size SLR + 70-200mm F2.8 class
- APS-C SLR + 70-200mm F2.8 class
- Medium format + Standard lens

NEW
PRO CF-734

25mm 4-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook, Exchangeable leg tips

Load Capacity 5kg
A: 1,650mm B: 1,325mm
180mm
475mm
1,350g

NEW
PRO CF-733

25mm 3-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook, Exchangeable leg tips

Load Capacity 5kg
A: 1,675mm B: 1,320mm
210mm
575mm
1,330g

SPIKE SET P.21

Light Weight type

- D-SLR
- Mirror-less SLR
- Digital Movie

NEW
PRO CF-634

22mm 4-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook

Load Capacity 3kg
A: 1,590mm B: 1,310mm
105mm
475mm
930g

NEW
PRO CF-633

22mm 3-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook

Load Capacity 3kg
A: 1,630mm B: 1,240mm
125mm
540mm
900g

NEW
PRO CF-635

22mm 5-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook

Load Capacity 3kg
A: 1,310mm B: 1,120mm
90mm
370mm
870g

Medume type

- Full-size SLR + 70-200mm F2.8 class
- APS-C SLR + 70-200mm F2.8 class
- Medium format + Standard lens

NEW
PRO CF-834BH6 ARCA-SWISS Compatible Q.R.S.

with ball head PBH-635AS

28mm 4-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook, Exchangeable leg tips

Load Capacity 6kg
A: 1,752mm B: 1,427mm
292mm
566mm
2,040g
6507 Q.R.S.

NEW
PRO CF-833BH6 ARCA-SWISS Compatible Q.R.S.

with ball head PBH-635AS

28mm 3-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook, Exchangeable leg tips

Load Capacity 6kg
A: 1,812mm B: 1,487mm
337mm
686mm
2,030g
6507 Q.R.S.

SPIKE SET P.21

Medume type

- Full-size SLR + 70-200mm F2.8 class
- APS-C SLR + 70-200mm F2.8 class
- Medium format + Standard lens

NEW
PRO CF-734BH5 ARCA-SWISS Compatible Q.R.S.

with ball head PBH-535AS

25mm 4-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook, Exchangeable leg tips

Load Capacity 5kg
A: 1,747mm B: 1,422mm
277mm
557mm
1,730g
6507 Q.R.S.

NEW
PRO CF-733BH5 ARCA-SWISS Compatible Q.R.S.

with ball head PBH-535AS

25mm 3-section Carbon Fiber

U1/4-U3/8 Head mounting screw, Three-steps leg opening, A.R.S. Anti Rotation System, crown-cap Leg lock system, Accessory hook, Exchangeable leg tips

Load Capacity 5kg
A: 1,772mm B: 1,417mm
307mm
657mm
1,710g
6507 Q.R.S.

SPIKE SET P.21

Recommendable Heads

NEW
SH-737HD P.16
with Quick Release Shoe

SH-726E P.16
with Quick Release Shoe

SH-707E P.18
with Quick Release Shoe

AF1100E P.18
with Quick Release Shoe

NEW
PBH-635AS P.17
with Quick Release Shoe

	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
SH-737HD	Single bubble level	50x76mm	U1/4	U1/4	105mm	650g	5kg
SH-726E	Single bubble level	56x52mm	U1/4	U1/4	104mm	580g	5kg
SH-707E	Dual axis bubble level	48x36mm	U1/4	U1/4	81mm	470g	5kg
AF1100E	Single bubble level	48x36mm	U1/4	U1/4	125mm	540g	1.5kg
PBH-635AS	Single bubble level	38x63mm	U1/4	U1/4-U3/8	102mm	484g	6kg

Recommendable 3-way Pan Heads

LIGHT WEIGHT
Constructed from cast Aluminum, designed for fitting carbon fiber tripods.

RUBBER COATED PAN HANDLES (SH-704E only)
Easy grip rubber handles for precise positioning.

	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
SH-705E	—	54x47mm	U1/4	U1/4	90mm	450g	5kg
SH-704E	Single bubble level	48x36mm	U1/4	U1/4	75mm	290g	3kg

SH-705E P.16
with Quick Release Shoe

SH-704E P.16
with Quick Release Shoe

LiTE Series

Light weight & compact for outdoor.
Exclusive Integrated Center Column LED Light.

Light Weight type

- D-SLR
- Mirror-less SLR
- Digital Movie



R.F.M. Rapid Flip Mechanism
Quick and easy leg angle adjustment and collapse.



LED LIGHT
Integrated LED light in center column for shooting in the dark.



Rubber grip of the 3-D molding
Easy to hold and no penetration of water even in rainy weather, etc. (except for AL-420S)

CARBON FIBER LEGS



ARCA-SWISS compatible
New high precision ball head SBH-180DS with ARCA-SWISS compatible quick release shoe.



Leg lock system (crown-type) (PAT.)
Twist lock system with double nut ring crown type (PAT.).



7-layers ARS carbon fiber pipes
Made by special extruding machines and higher rigidity than 8-10 layers' carbon fiber pipes made by hand-rolling.



EXCLUSIVE BAG

LiTE CF-522

with ball head SBH-180DS

22mm 5-section Carbon Fiber

Three-steps leg opening A.R.S. Anti Rotation System crown-cap Leg lock system Accessory hook

Load Capacity 3kg Max. height A:1,466mm B:1,217mm Min. height 187mm Max. width 370mm Weight 1,113g (including batteries) 6502 Q.R.S



LiTE CF-422

with ball head SBH-180DS

22mm 4-section Carbon Fiber

Three-steps leg opening A.R.S. Anti Rotation System crown-cap Leg lock system Accessory hook

Load Capacity 3kg Max. height A:1,782mm B:1,427mm Min. height 196mm Max. width 473mm Weight 1,178g (including batteries) 6502 Q.R.S



Be a 500cc PET bottle

When folded, becoming the same size as 500cc PET bottle because of especially designed head and it fits between legs.

	Max. height	Folded length	Weight	Leg Section
CF-522	1,466mm	370mm	1,113g	5
CF-422	1,782mm	473mm	1,178g	4
AL-420S	1,014mm	310mm	785g	4
AL-420M	1,241mm	358mm	930g	4
AL-420	1,534mm	428mm	1,015g	4

ALUMINUM LEGS



Adopting a one-touch quick release shoe type

Equipped with a dedicated camera platform, which was long the connection of the camera platform and the ball portion.



Lever-type leg lock system

Easy and fast for leg opening & closing.

LiTE AL-420

with ball head SBH-100DQA

20mm 4-section Aluminum

Load Capacity 2kg Max. height A:1,534mm B:1,309mm Min. height 428mm Max. width 170mm Weight 1,015g (including batteries) 6252 Q.R.S



LiTE AL-420M

with ball head SBH-100DQA

20mm 4-section Aluminum

Load Capacity 2kg Max. height A:1,241mm B:1,070mm Min. height 358mm Max. width 165mm Weight 930g (including batteries) 6252 Q.R.S

LiTE AL-420S

with ball head SBH-100DQA

20mm 4-section Aluminum

Load Capacity 2kg Max. height A:1,014mm B:890mm Min. height 310mm Max. width 158mm Weight 785g (including batteries) 6252 Q.R.S



PROFESSIONAL Series

Designed with the professional photographer in mind. Ultra heavy construction for use with D-SLR and 35mm still camera with long telephoto/zoom lens, large format camera and medium format camera.

Heavy-duty & Large type

MADE IN JAPAN

Full-size/APS-C SLR + Super-telephoto lens

Medium format + Telephoto lens

8x10-4x5 format/Studio shot

THE PROFESSIONAL

Heavy duty construction. 3-way pan head provides ultra-smooth camera movement. Adjustable camera mounting screw for both 1/4" and 3/8". Dual axis bubble level for precise horizontal positioning. Grooved tubular legs allow you to extend legs quickly and easily. Worm gear elevation control for precise height setting. 100mm indexed reference marks on the second leg section for precise leg alignment.



Worm gear

It operates up and down when operating the handle. It corresponds to the weight equipment because they do not own weight fall.



3-steps leg angle adjustment

Leg angle adjustable from a high position to a low position.



Grooved pipes

Possible to pipe each other to stretch smoothly without idling.



Camera mounting screw (corresponding both U1/4 and U3/8 screws)
Housing an U3/8 screw into the camera platform.

THE PROFESSIONAL 4

with high precision 3-way pan head SH-909

36mm 4-section Aluminum

Load Capacity 12kg Max. height A:2,530mm B:2,250mm Min. height 590mm Max. width 935mm Weight 6,810g



THE PROFESSIONAL

with high precision 3-way pan head SH-909

36mm 3-section Aluminum

Load Capacity 12kg Max. height A:2,000mm B:1,720mm Min. height 590mm Max. width 900mm Weight 6,210g



PROFESSIONAL II-LE

with high precision 3-way pan head SH-908

32mm 3-section Aluminum

Load Capacity 10kg Max. height A:1,835mm B:1,550mm Min. height 585mm Max. width 810mm Weight 4,810g



One size smaller The Professional for the shooting in the outdoors.
Equipped with a urethane soft grip.

Optional short center column for The Professional series

Optional short center column for Professional II-LE

Exchanging the standard center column and then, you will get lower position. (see page No.21)



Legs

36mm 4-section Aluminum



THE PROFESSIONAL 4 LEG

	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight
THE PROFESSIONAL 4 LEG	U1/4 + U3/8	2,390mm	450mm	795mm	5,100g
THE PROFESSIONAL LEG	U1/4 + U3/8	1,860mm	450mm	760mm	4,500g

36mm 3-section Aluminum



THE PROFESSIONAL LEG

32mm 3-section Aluminum



PROFESSIONAL II-LE LEG

	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight
PROFESSIONAL II-LE LEG	U1/4 + U3/8	1,700mm	450mm	675mm	3,400g

A.M.T. Series

Suitable for use with D-SLR/35mm cameras, most telephoto and zoom lenses, medium format cameras, and some (portable 4x5) field cameras.



SLIK Super Alloy A. M. T.
A.M.T. alloy has a 40% greater strength to weight ratio than standard aluminum, meaning the legs are lighter weight yet stronger than the standard metal used in most of today's tripods.



Head mounting screw
Corresponding to both U1/4 and U3/8 head mounting screws.



3-steps leg angle adjustment
Leg angle adjustable from a high position to a low position.



Lever-type leg lock
Robust leg lock system that can operate quickly and easily.



Plastic lever-type leg lock
Compact and light-weight plastic leg lock.

Heavy-duty type

- Full-size APS-C SLR + 300mm F2.8 class
- Medium format + Telephoto lens
- 4x5 format field camera

PRO 700DX

with 3-way pan head PRO 700DX HEAD

- 30.2mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Lever-type leg lock

- Load Capacity 8kg
- A: 1,900mm B: 1,520mm
- 395mm
- 760mm
- 3,670g
- 6124 Q.R.S 6125 Q.R.S



NEW PRO 700BH6

ARCA-SWISS Compatible Q.R.S.

with ball head PBH-635AS

- 30.2mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Lever-type leg lock

- Load Capacity 6kg
- A: 1,882mm B: 1,502mm
- 377mm
- 766mm
- 3,150g
- 6507 Q.R.S



Legs

- 30.2mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy

PRO 700DX LEG

	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight
PRO 700DX LEG	U1/4 · U3/8	1,780mm	275mm	680mm	2,670g
PRO 500DX LEG	U1/4 · U3/8	1,545mm	250mm	625mm	2,080g

Medium type

- Full-size SLR + 70-200mm F2.8 class
- APS-C SLR + 70-200mm F2.8 class
- Medium format + Standard lens

PRO 500DX

with 3-way pan head ABLE 300DX HEAD

- 26.8mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Lever-type leg lock

- Load Capacity 6kg
- A: 1,645mm B: 1,385mm
- 350mm
- 695mm
- 2,730g
- 6123 Q.R.S



NEW PRO 500BH5

ARCA-SWISS Compatible Q.R.S.

with ball head PBH-535AS

- 26.8mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Lever-type leg lock

- Load Capacity 5kg
- A: 1,642mm B: 1,382mm
- 347mm
- 707mm
- 2,460g
- 6507 Q.R.S



Legs

- 26.8mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy

PRO 500DX LEG

- APS-C SLR + 70-300mm Zoom
- Digital Movie
- Mirror-less SLR

PRO 330DX

with 3-way pan head SH-705E

- 23.4mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 3kg
- A: 1,592mm B: 1,242mm
- 294mm
- 600mm
- 1,705g
- 6123 Q.R.S



PRO 340BH

with ball head SBH-200DQ

- 23.4mm 4-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 3kg
- A: 1,437mm B: 1,147mm
- 255mm
- 515mm
- 1,525g
- 6183 Q.R.S



PRO 330AF

with AF1100E

- 23.4mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 1.5kg
- A: 1,627mm B: 1,277mm
- 329mm
- 660mm
- 1,795g
- 6183 Q.R.S



ABLE Series

Medium type

- Full-size SLR + 70-200mm F2.8 class
- APS-C SLR + 70-300mm Zoom
- Digital Movie
- Mirror-less SLR

PRO 400DX

with 3-way pan head SH-705E

- 27mm 3-section
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Lever-type leg lock

- Load Capacity 5kg
- A: 1,535mm B: 1,270mm
- 590mm
- 650mm
- 2,520g
- 6123 Q.R.S



ABLE 300DX

with 3-way pan head ABLE 300DX HEAD

- 27mm 3-section
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening

- Load Capacity 5kg
- A: 1,550mm B: 1,285mm
- 470mm
- 655mm
- 2,600g
- 6123 Q.R.S



PRO 340DX

with 3-way pan head SH-705E

- 23.4mm 4-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock
- Load Capacity 3kg
- A: 1,440mm B: 1,150mm
- 258mm
- 490mm
- 1,625g
- 6123 Q.R.S



NEW PRO 340BH5

ARCA-SWISS Compatible Q.R.S.

with ball head PBH-535AS

- 23.4mm 4-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock
- Load Capacity 3kg
- A: 1,447mm B: 1,157mm
- 265mm
- 507mm
- 1,540g
- 6507 Q.R.S



Legs

- 23.4mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy

PRO 330DX LEG

	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight
PRO 330DX LEG	U1/4 · U3/8	1,502mm	204mm	535mm	1,255g
PRO 340DX LEG	U1/4 · U3/8	1,350mm	168mm	425mm	1,175g

- 23.4mm 4-section
- A.M.T. Aluminum-Magnesium-Titanium alloy

PRO 340DX LEG



Head mounting screw
Corresponding to both U1/4 and U3/8 head mounting screws.



3-steps leg angle adjustment
Leg angle adjustable from a high position to a low position.



Lever-type leg lock
Robust leg lock system that can operate quickly and easily. (PRO 400DX only)

Legs

- 27mm 3-section

PRO 400DX LEG

	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight
PRO 400DX LEG	U1/4 · U3/8	1,445mm	240mm	580mm	2,070g
ABLE 300DX LEG	U1/4 · U3/8	1,450mm	370mm	585mm	1,950g

- 27mm 3-section

ABLE 300DX LEG

HD Series

High definition series tripod.

Medium type

- APS-C SLR + 70-300mm Zoom
- Digital Movie
- Mirror-less SLR

HIGH DEFINITION SERIES TRIPODS

These tripods equip special 3-way pan head with oil fluid system. Pan and tilt frictions are adjusted by knobs easily. These tripods are the best for D-SLR with D-movie, yet suitable for D-SLR camera.

NEW

PRO 500 HDII

with 3-way pan head SH-737HD

- 26.8mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Lever-type leg lock

- Load Capacity 5kg
- A: 1,650mm B: 1,390mm
- 355mm
- 710mm
- 2,730g
- 6264 Q.R.S



Best for D-Movie

NEW

PRO 340 HDII

with 3-way pan head SH-737HD

- 23.4mm 4-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 3kg
- A: 1,455mm B: 1,165mm
- 273mm
- 507mm
- 1,810g
- 6264 Q.R.S



Best for D-Movie

NEW

PRO 330 HDII

with 3-way pan head SH-737HD

- 23.4mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 3kg
- A: 1,607mm B: 1,257mm
- 309mm
- 615mm
- 1,905g
- 6264 Q.R.S



Best for D-Movie

EZ Series

Multi-action head series tripods.

Medium type

- Full-size SLR + 70-200mm F2.8 class
- APS-C SLR + 70-300mm Zoom
- Digital Movie

MULTI-ACTION HEAD SERIES TRIPODS

These tripods have the unique "Multi-action" head which allows easy operation with a single pan-tilt handle for D-SLR especially. It gives you the opportunity to pan and tilt simultaneously or individually and this permits you to take pictures at any desired angle.

MASTER CLASSIC

with multi-action head MASTER CLASSIC HEAD

- 28mm 3-section
- Aluminum

- Load Capacity 6kg
- A: 1,630mm B: 1,495mm
- 650mm
- 2,550g



PRO 330EZ

with multi-action head SH-707E

- 23.4mm 3-section
- A.M.T. Aluminum-Magnesium-Titanium alloy
- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 3kg
- A: 1,583mm B: 1,233mm
- 285mm
- 600mm
- 1,725g
- 6183 Q.R.S



NEW

SPRINT PRO III EZ

with multi-action head SH-707E

- 20mm 4-section
- Aluminum
- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 2kg
- A: 1,605mm B: 1,305mm
- 165mm
- 485mm
- 1,360g
- 6183 Q.R.S



Legs

MASTER CLASSIC LEG

- 28mm 3-section
- Aluminum



Heads

MASTER CLASSIC HEAD

Multi-action head for medium format and 35mm / D-SLR.



	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight	
MASTER CLASSIC LEG	U1/4	1,500mm	500mm	560mm	1,769g	
	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
MASTER CLASSIC HEAD	49x49mm	U1/4	U1/4	130mm	770g	6kg

Optional accessories



Long pan handle for SH-707E

227mm length / 65mm longer than the standard pan handle

SPRINT Series

Designed to travel, designed for photography, designed for the digital era, the SPRINT line of tripods can greatly improve photo by stabilizing your camera, which is critically important for sharp pictures.

Light Weight & Compact type

- D-SLR
- Mirror-less SLR
- Digital Movie

Innovative models for digital photography

Designed to travel, designed for photography, designed for the digital era, the SPRINT line of tripods can greatly improve photo by stabilizing your camera, which is critically important for sharp pictures. These all-metal tripods have strength combined with compact size to travel with ease.



R.F.M. for SPRINT III Series
The series introduced well accepted SLIK original R.F.M. (Rapid Flip Mechanism) allows easy leg opening adjustment.

NEW

SPRINT PRO III 3WAY GM / BK

with 3-way pan head SH-704E

- 20mm 4-section
- Aluminum

- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 2kg
- A: 1,605mm B: 1,305mm
- 165mm
- 475mm
- 1,180g
- 6183 Q.R.S



GM (Gray Metallic)

BK (Black)

NEW


SPRINT PRO III BH GM / BK

with ball head SBH-100DQ

- 20mm 4-section
- Aluminum

- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 2kg
- A: 1,598mm B: 1,298mm
- 158mm
- 470mm
- 1,020g
- 6252 Q.R.S

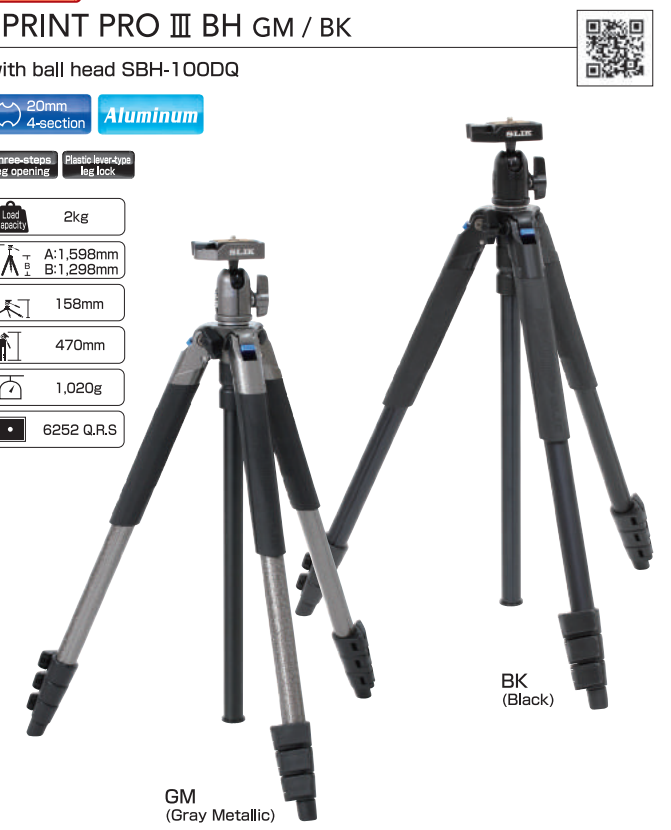

GM (Gray Metallic)

BK (Black)

NEW


SPRINT MINI III GM / BK

with ball head SBH-100DQ

- 20mm 4-section
- Aluminum

- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 2kg
- A: 1,078mm B: 868mm
- 153mm
- 335mm
- 860g
- 6252 Q.R.S

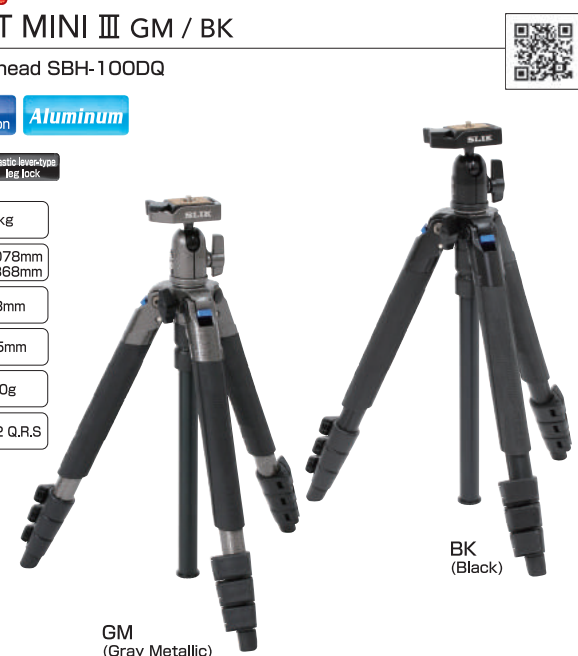

GM (Gray Metallic)

BK (Black)

NEW

VIDEO SPRINT III

with Video head

- 20mm 4-section
- Aluminum

- Three-steps leg opening
- Plastic lever-type leg lock

- Load Capacity 2kg
- A: 1,600mm B: 1,300mm
- 160mm
- 480mm
- 1,140g
- 6014 Q.R.S



U Series

Light weight & compact type

- D-SLR
- Digital Movie
- Mirror-less SLR
- Compact Camera

Popular, light weight, and an excellent value.
Easy to operate for both still and video photography.

LARGE SIZE LEG OPENING LEVERS
Let you adjust tripod height without taking your eye away from the viewfinder.



Quick release shoe for easy mounting and removal of camera or camcorder.



The center column elevation that is easy to get fine adjustment.

U 9000

2-WAY Leg-Tip

23mm 3-section Aluminum

- Load Capacity: 2kg
- Height: A:1,500mm B:1,200mm
- Max. Height: 590mm
- Weight: 1,600g
- 6122 Q.R.S



U 8000

Win the Good Design

23mm 3-section Aluminum

- Load Capacity: 2kg
- Height: A:1,500mm B:1,200mm
- Max. Height: 590mm
- Weight: 1,500g
- 6122 Q.R.S



NEW

U 874

23mm 4-section Aluminum

- Load Capacity: 1.5kg
- Height: A:1,500mm B:1,240mm
- Max. Height: 500mm
- Weight: 1,270g
- 6122 Q.R.S



NEW

U 873

23mm 3-section Aluminum

- Load Capacity: 1.5kg
- Height: A:1,500mm B:1,177mm
- Max. Height: 553mm
- Weight: 1,260g
- 6122 Q.R.S



COMPACT & MINI Series

Light weight & compact type

- D-SLR
- Digital Movie
- Mirror-less SLR
- Compact Camera

The most compact and versatile minipod. Ideal for low position photography and also as a chestpod.

COMPACT 8

20mm 4-section Aluminum

- Load Capacity: 1kg
- Height: A:1,035mm B:849mm
- Max. Height: 365mm
- Weight: 615g



MINI-PRO 7

20mm 2-section Aluminum

- Load Capacity: 2kg
- Height: A:450mm B:245mm
- Max. Height: 140mm
- Weight: 195mm
- 540g
- 6256N Q.R.S



MINI-PRO DQ

20mm 2-section Aluminum

- Load Capacity: 1kg
- Height: A:226mm B:181mm
- Max. Height: 205mm
- Weight: 350g
- 6252 Q.R.S



MINI-PRO V

20mm 2-section Aluminum

- Load Capacity: 1kg
- Height: A:218mm B:173mm
- Max. Height: 200mm
- Weight: 345g



MINI-8

20mm 2-section Aluminum

- Load Capacity: 1kg
- Height: A:210mm B:164mm
- Max. Height: 205mm
- Weight: 300g



MÉMOIRE Series

Mini type

- Compact Camera

Corresponding to the smartphone and digital camera, as well as video with a detachable smartphone holder.

MÉMOIRE MINI T2

Aluminum

- Load Capacity: 2kg
- Height: 52mm
- Max. Height: 138mm
- Weight: 125g



RD (Red)



GR (Green)



WH (White)



BK (Black)

Video Series

- D-SLR
- Video Camera
- Digital Movie

505QF

with fluid video head 505QF HEAD

28mm 3-section Aluminum

- Load Capacity: 5kg
- Height: A:1,640mm B:1,360mm
- Max. Height: 750mm
- Weight: 3,600g
- 6011 Q.R.S

Best for D-Movie



NEW

PRO 330 VIDEO

with fluid video head SVH-500

23.4mm 3-section A.M.T. Aluminum-Magnesium-Titanium alloy

- U1/4-U3/8 Head mounting screw
- Three-steps leg opening
- Plastic lever-type leg lock
- Load Capacity: 3kg
- Height: A:1,612mm B:1,262mm
- Max. Height: 314mm
- Weight: 620mm
- 1,755g
- 6502 Q.R.S

Best for D-Movie



504QF II

with fluid video head 504QF II HEAD

27mm 3-section Aluminum

- Load Capacity: 3kg
- Height: A:1,560mm B:1,295mm
- Max. Height: 450mm
- Weight: 690mm
- 2,570g
- 6027 Q.R.S

Best for D-Movie



NEW

VIDEO SPRINT III

with video head

20mm 4-section Aluminum

- Three-steps leg opening
- Plastic lever-type leg lock
- Load Capacity: 2kg
- Height: A:1,600mm B:1,300mm
- Max. Height: 160mm
- Weight: 480mm
- 1,140g
- 6014 Q.R.S



Video heads Designed for video cameras

	Bubble level	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
505QF HEAD	Single bubble level	U1/4	U1/4 • U3/8	100mm	1,200g	5kg
504QF II HEAD	Single bubble level	U1/4	U1/4	105mm	620g	3kg



505QF HEAD

with Quick Release Shoe



504QF II HEAD

with Quick Release Shoe

Tripod Heads

High Precision 3-way Pan Heads



SH-909

Heavy duty construction. 3-way pan head for large format cameras, medium format cameras and 35mm/D-SLR cameras with long telephoto lenses.



SH-908

Heavy duty construction, just smaller size of SH-909, 3-way pan head for large format cameras, medium format cameras and 35mm/D-SLR cameras with long telephoto lenses.



SH-807E

with Quick Release Shoe

High precision 3-way pan head for medium format and 35mm/D-SLR with long telephoto lenses.

6196 Q.R.S



SH-806E

with Quick Release Shoe

An easy to use pan/tilt head for cameras up to medium format.

6196 Q.R.S



	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
SH-909	Dual axis bubble level	82x90mm	U1/4 • U3/8	U3/8	140mm	1,710g	12kg
SH-908	Dual axis bubble level	72x71mm	U1/4 • U3/8	U3/8	135mm	1,410g	10kg
SH-807E	Dual axis bubble level plus single bubble level	57x59mm	U1/4	U3/8	150mm	1,000g	10kg
SH-806E	Dual axis bubble level plus single bubble level	57x59mm	U1/4	U1/4	134mm	700g	7kg

for D-Movie 3-way Pan Heads



These tripods equip special 3-way pan head with oil fluid system.

Pan and tilt frictions are adjusted by knobs easily. These tripods are the best for D-SLR with D-movie, yet suitable for D-SLR camera.

SH-837HD



SH-737HD

with Quick Release Shoe

6264 Q.R.S



SH-734HD

with Quick Release Shoe

6264 Q.R.S



	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
SH-837HD	Dual axis bubble level plus single bubble level	57x76mm	U1/4	U3/8	120mm	1,020g	7kg
SH-737HD	Single bubble level	50x76mm	U1/4	U1/4	105mm	650g	5kg
SH-734HD	Single bubble level	50x76mm	U1/4	U1/4	97mm	540g	3kg

3-way Pan Heads



SH-726E

with Quick Release Shoe

Compact size 3-way pan head with quick release shoe and a bubble level.

6256 Q.R.S



SH-724E

with Quick Release Shoe

Compact and light weight 3-way pan head with quick release shoe and a bubble level.

6264 Q.R.S



SH-705E

with Quick Release Shoe

Compact and light weight 3-way pan head for Carbon Fiber tripods, A.M.T. tripods and others. With convenient omnidirectional quick release shoe.

6123 Q.R.S



SH-704E

with Quick Release Shoe

Compact and light weight 3-way pan head with convenient quick release shoe.

6183 Q.R.S



	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
SH-726E	Single bubble level	56x52mm	U1/4	U1/4	104mm	580g	5kg
SH-724E	Single bubble level	50x76mm	U1/4	U1/4	97mm	520g	3kg
SH-705E	—	54x47mm	U1/4	U1/4	90mm	450g	5kg
SH-704E	Single bubble level	48x36mm	U1/4	U1/4	75mm	290g	3kg

3-way Pan Heads



PRO 700DX HEAD

with Quick Release Shoe

Special 4-way pan head – normal 3-way plus movement of round type quick release shoe. Its unique quick release system is one of the fastest and easiest to use in the industry.

6124 Q.R.S
6125 Q.R.S



ABLE 300DX HEAD

with Quick Release Shoe

The ABLE 300DX Pan Head is solid, precision-machined aluminum. This all-metal head has the strength and durability to handle many DSLRs, mirrorless interchangeable lens cameras (ILCs) and lenses.

6123 Q.R.S



	Bubble level	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
PRO 700DX HEAD	Dual axis bubble level	U1/4 (U3/8 as option)	U3/8	120mm	1,000g	8kg
ABLE 300DX HEAD	—	U1/4	U1/4	100mm	650g	6kg

Ball Heads



SBH-808DQ

Large quick release shoe is designed for sure and easy camera mounting. Independent rotating feature adds to more creative freedom. Friction control system ensures perfect movements against various equipments.

6124 Q.R.S
6125 Q.R.S



PBH-635AS

ARCA-SWISS Compatible Q.R.S.

Newly designed "Cam Lock" Arca-Swiss compatible quick release system for easy mounting the camera. 3 adjustment knobs for locking, panning and friction control makes fast and easy set up.

NEW

6507 Q.R.S



PBH-535AS

ARCA-SWISS Compatible Q.R.S.

NEW

6507 Q.R.S



SBH-200DQ BK

The new SLIK SBH-200 DQ compact ball head is durable and all-metal. It's one-lever operation makes for simple and easy camera movements. In addition, the bubble levels mounted on dual axis make accurate leveling of the camera easy.

6183 Q.R.S



SBH-150DQ BK

The SBH-150DQ compact ball head, for monopods and lightweight tripods, features a single lever lock. The lock releases the ball allowing the camera to be positioned at angles and locked into place.

6183 Q.R.S



SBH-100DQ BK

The SBH-100DQ BK compact ball head is ultra-light. A single lever locks and releases the ball allowing for a full range of movement. As a result, you can lock the camera in position at almost any angle. The all-metal ball head has a small, low profile quick release plate.

6252 Q.R.S



	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Base diameter	Height	Weight	Load capacity
SBH-808DQ	—	50x50mm	U1/4	U1/4 • U3/8	60mm	120mm	760g	5kg
PBH-635AS	Single bubble level	38x63mm	U1/4	U1/4 • U3/8	56mm	104mm	484g	6kg
PBH-535AS	Single bubble level	38x63mm	U1/4	U1/4 • U3/8	50mm	98mm	378g	5kg
SBH-200DQ BK	Dual axis bubble level	48x36mm	U1/4	U1/4	43mm	87mm	350g	5kg
SBH-150DQ BK	Dual axis bubble level	48x36mm	U1/4	U1/4	37mm	87mm	235g	3kg
SBH-100DQ BK	—	40x30mm	U1/4	U1/4	37mm	68mm	130g	2kg

Tripod Heads

Trigger Heads

AF2100

with Quick Release Shoe

6019 Q.R.S

A tripod head that gives you the feeling of 'HAND HELD'. Left hand on the grip, and right hand on the shutter button. Squeeze the trigger to move the camera freely, and let go to lock in. Panoramic shots are easy. Push the little grey switch up, and the camera platform rotates freely. Push down and it's locked. Vertical shots are easy. Just tilt the cut out towards the center ball axis. Winner, The MITI of Japan "Good Design" (G-Mark) award and also, "Long Life" award.



Won the Good Design Long Life Design Award

AF1100E

with Quick Release Shoe

6183 Q.R.S

Simply squeeze the trigger handle to move the head, and let go to lock in any positions. The handle grip makes the ball head feel like more of an extension of your hand than other ball heads available. This trigger style ball head has a bubble level for easy and accurate camera leveling.



	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
AF2100	Single bubble level	41x47mm	U1/4	U1/4 • U3/8	140mm	870g	3kg
AF1100E	Single bubble level	48x36mm	U1/4	U1/4 • U3/8	125mm	540g	1.5kg



Multi Action Heads

These tripods have the unique "Multi-action" head which allows easy operation with a single pan-tilt handle for D-SLR especially. It gives you the opportunity to pan and tilt simultaneously or individually and this permits you to take pictures at any desired angle.



MASTER CLASSIC HEAD

Multi-action head for medium format and 35mm / D-SLR.

	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
MASTER CLASSIC HEAD	—	49x49mm	U1/4	U1/4	130mm	770g	6kg
SH-707E	Dual axis bubble level	48x36mm	U1/4	U1/4	81mm	470g	5kg

SH-707E

with Quick Release Shoe

6183 Q.R.S

Easy operation with a single pan-tilt handle. Pan and tilt can be operated simultaneously or individually.



Optional accessories

Long pan handle for SH-707E

227mm length / 65mm longer than the standard pan handle



Video Heads

505QF HEAD

with Quick Release Shoe

6011 Q.R.S

2-way fluid video head. Heavy duty construction for use with any compact to full size video cameras.



504QF II HEAD

with Quick Release Shoe

6027 Q.R.S

3-way fluid video head for video cameras, also for D-SLR with D-movie.



	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
505QF HEAD	Single bubble level	43x52mm	U1/4	U1/4 • U3/8	100mm	1,200g	5kg
504QF II HEAD	Single bubble level	43x79mm	U1/4	U1/4	105mm	620g	3kg



Special Head for Long Telephoto Lens, Scope & Video

High Precision Shooting Head for scope and video.

DIGITAL BALANCE PRO

with Quick Release Shoe

6129 Q.R.S

152mm range of sliding plate makes easy setting up. Counter spring makes a correction of balance shifting to the leaning to the back or front. Developed for a video camera and a field scope.



Concentrating the operating unit to the left side

Both Tilting knob and Panning knob to the left side in order to improve the operability.



Coming with a long pan handle

Achieving a smooth motion by spring-balance + oil fluid system. It can be operated with a light force by the long pan handle.

Bubble level	Cam Balancer available weight	Camera mounting screw	Tripod mounting screw	Temperature range
Single bubble level	approx. 1~2kg	U1/4x1	U1/4 • U3/8	-15°C~+50°C
Tilt range	Camera mount plate	Height	Weight	Maximum loading weight
90° (up) and 90° (down)	Rubber	118mm	1,300g	5.0 kg



Micro Motion Heads

Ideal pieces for astronomical and timelapse shooting



typical set up for astronomical shooting

ASTRA Time-Lapse & Sky Tracker

Motorized turn table for Astronomical and Timelapse shooting

NEW

ECH-630

The SLIK ASTRA ECH-630 Sky-Tracker is a compact motorized turn table with speed settings for star, moon, and time-lapse photography. Some astro-tracking heads can weigh up to 5kg but the ECH-630 weighs just 630g and takes up about the same amount of room as a 24-70mm lens in your camera bag. This makes it perfect for photographers that hike into remote locations to shoot the stars.

The ECH-630 capacity varies based on its angle. It can hold up 5kg when the turntable is flat and up to 2kg at a 90 degree angle. This makes it perfect for light-weight DSLR cameras or mirrorless cameras with fast prime lenses.

4 high-quality AA sized batteries are all that is needed for the ECH-630 to operate for up to 20 hours of celestial tracking, more than enough for a full night. The unit also has a micro USB port to connect an external battery for even longer run times.



Dimension	D: 84 x W: 86 x H:65mm (exclude protrusions)
Weight	630g (without batteies, cables)
Head Mount Screw	U1/4
Tripod Mounting Screw	U1/4 • U3/8 (double screw adapter)
Max. Load Capacity	at Astronomical Mode: 5 kg at Time-Lapse Mode : 5 kg when the turn table and the ground are close to parallel : 5 kg when the turn table and the ground are close to perpendicular : 2kg (all subject less than 20kg·cm of moment load / about 2kg at 10 cm from rotation axis)

Power	4 AA alkaline batteries (Ni-MH batteries can also be used) DC 5V (micro-USB use together with AA batteries)
Battery Duration	about 20 hours (with alkaline batteirs at 20°C)
Operating Temperature	-10°C ~ +40°C (without condensation)
Driving Method	Worm Wheel (by stepping motor)
Astronomical Mode	Star, Moon, Sun & Starscape (0.5x speed) Northern / Southern Hemisphere setting
Time-Lapse Mode	Clockwise, Counterclockwise & Repeat rotation setting Rotation Angle: 5° to 360° (5° increments) or Endless Rotation Speed: 48, 24, 12, 6, 3, 1.5h, 1h, 30min & 15min per one rotation

MICRO MOTION HEAD

Micro Motion Head for close-up and astronomical shooting

NEW

SMH-250

The SLIK SMH-250 Micro Motion Head that can be used with the "ASTRA" ECH-630 Sky Tracker or any camera or head. This mount allows the ECH-630 to tilt up to 90 degrees and has 4 individual thumb screws for making minute adjustments to the position of the head. This makes finetuning polar alignment of the ECH-630 much easier.

Besides use of sky tracker, the SMH-250 is ideal piece for the macro shooting and the sports optics for fine angle adjustment.

The SMH-250 is all-aluminum and weighs just 250g and takes up little room in a camera bag.

The base of the SMH-250 is Acra-Swiss compatible so it is will easily mount into any tripod head with an Arca-Swiss compatible quick release system.



Size	H:37 x W: 88 x D: 46mm
Height Adjustment Angle	20° (±10°)
Pan Adjustment Angle	16° (±8°)
Adjustment Method	Push Screw (1.7° by one full knob rotation)
Weight	250g

Head Mount Screw	U1/4
Tripod Mount Screw	U1/4
Max. Load Capacity	6kg
Accessories	Height adjustment wedge (0 to 90°, 9° pitch)

Recommendable Legs

PRO 400DX LEG



23.4mm 3-section

A.M.T. Aluminum-Magnesium-Titanium alloy



PRO 330DX LEG



23.4mm 4-section

A.M.T. Aluminum-Magnesium-Titanium alloy



	Head attachment screw	Max. operating height	Min. operating height	Folded length	Weight
PRO 400DX LEG	U1/4	1,445mm	240mm	580mm	2,070g
PRO 330DX LEG	U1/4	1,502mm	204mm	535mm	1,255g

Recommendable Heads



SBH-200DQ BK

P.17



NEW

PBH-535AS

P.17

	Bubble level	Size of camera platform	Camera mounting screw	Tripod mounting screw	Height	Weight	Load capacity
SBH-200DQ BK	Dual axis bubble level	48x36mm	U1/4	U1/4	87mm	350g	5kg
PBH-535AS	Single bubble level	38x63mm	U1/4	U1/4 • U3/8	98mm	378g	5kg

Monopods against Vertical Shake

Although a monopod can not stand by itself, it gives you an easy, go anywhere support system for your camera, and eliminates that undesirable vertical movement created when your camera is hand-held.

Your pictures are sharper and clearer. Lighter, and much compact than a tripod, the monopod supports the camera weight, prevents shakes, and lets you focus critically as well as let you shoot at slow shutter speeds.

STANDPOD 7

with ball head SBH-150DQ

26.8mm
4-section

A.M.T.
Aluminum-Magnesium-Titanium alloy

Load Capacity
2kg

955g

6256N Q.R.S

Max. operating height 1,750mm
Folded length 745mm

STANDPOD

with 2Way Pan Head

26.8mm
4-section

A.M.T.
Aluminum-Magnesium-Titanium alloy

Load Capacity
1kg

720g

Max. operating height 1,775mm
Folded length 720mm

NEW

PRO POD CF-834

Twist leg lock type

28mm
4-section

Carbon Fiber

500g

Max. operating height 1,629mm
Folded length 500mm

A.R.S.
Anti Rotation System

Exchangeable leg tips

PRO POD 600

Lever leg lock type

30.2mm
4-section

A.M.T.
Aluminum-Magnesium-Titanium alloy

600g

Max. operating height 1,600mm
Folded length 535mm

LIGHTY POD DQ

Lever leg lock type

with ball head SBH-100DQ BK

26.8mm
5-section

A.M.T.
Aluminum-Magnesium-Titanium alloy

490g

6252 Q.R.S

Max. operating height 1,615mm
Folded length 530mm

LIGHTY POD 200

Lever leg lock type

with ball head SBH-100

23.4mm
4-section

A.M.T.
Aluminum-Magnesium-Titanium alloy

380g

Max. operating height 1,585mm
Folded length 555mm

LIGHTY POD 100

Lever leg lock type

with ball head SBH-60

20mm
4-section

Aluminum

240g

Max. operating height 1,360mm
Folded length 435mm

SLIM POD-X

Lever leg lock type

with 2Way Pan Head

20mm
4-section

Aluminum

290g

Max. operating height 1,465mm
Folded length 500mm

MONOPOD 350

Lever leg lock type

26.8mm
4-section

A.M.T.
Aluminum-Magnesium-Titanium alloy

350g

Max. operating height 1,600mm
Folded length 510mm

MAGNESIUM QUICK RELEASE ADAPTER



DQ-55
Weight 108g
Length 60mm
Width 100mm
Height 19mm



DQ-50
Weight 103g
Length 60mm
Width 100mm
Height 19mm



DQ-L SHOE
Weight 42g
Length 53mm
Width 75mm
Height 11mm



DQ-S SHOE
Weight 37g
Length 53mm
Width 65mm
Height 11mm

ALUMINIUM QUICK RELEASE ADAPTER



DQ-20
Dual Axis Bubble Level
Weight 120g
Length 57mm
Width 81mm
Height 20mm



DQ-10
Weight 54g
Length 38mm
Width 60mm
Height 15mm

DOLLY DOLLY II



Folded Length 580mm
Max. extended diameter 1,020mm
Height 155mm
Weight 4,050g

OPTIONAL CENTER COLUMNS

Model / Series	Available tripods
For The Professional series	The Professional, The Professional 4
For Professional II-LE	Professional II-LE & Grand Pro CF4

Exchanging the standard center column and then, you will get lower position.

CARRYING CASES & STRAPS

Carrying Case model	Available tripods	Carrying Case model	Available tripods
Tripod case #2960	up to 960mm folded length tripod	Tripod case #550	up to 550mm folded length tripod
Tripod case #2820	up to 820mm folded length tripod	Tripod case #500	up to 500mm folded length tripod
Tripod case #2770	up to 770mm folded length tripod	Monopod case #2650	up to 650mm folded length monopod
Tripod case #2660	up to 660mm folded length tripod	Strap L	for midium and large tripod
Tripod case #601	up to 600mm folded length tripod	Strap M	for compact tripod

OTHERS

LEVELING UNIT 2

Mounted between the head and tripod leg, you can make the leveling easier. Want to rotate the head remains horizontal, necessities of movie shooting. Adopt a rotary lock that does not choose the location of the lock. The adjustment angle is 15°(±7.5°)

Height 34mm Weight 200g Head mounting surface diameter 65mm
Head mounting screw U1/4 Tripod mounting screw U1/4
(also available U3/8 by removing the adapter)

TWIN CAMERA PLATE 300

Designed for using two cameras, or various accessories on one tripod. TWIN CAMERA PLATE 300 comes with small thread screws, and is more suitable for 35mm/D-SLR cameras.

Weight 500g Length 315mm
Width 50mm Height 50mm

QUICK RELEASE SHOES / PLATES



FOR LITE CF-422 / LITE CF-522




FOR SH-724E / SH-734HD / SH-737HD




FOR GX 6300 / GX 6400



FOR SH-806E / SH-807E



FOR DAIWA VT-523



FOR U 9000 / U 8000 / U 7700 / U 6600 / U 5500 / U 3300 / U 873 / U 874



FOR VT-551 / PRO 340QF / 504QF II / 504QF II HEAD




FOR AF2100



FOR PRO 724CBH / PRO 634CBH / PRO 500BHX / PRO 340BHX / PBH-525DS / PBH-425DS



FOR PBH-635AS / PBH-535AS



FOR PRO 823HC / ABL 300HC / MINI-PRO 7 / STANDPOD 7



FOR PRO 724DX / PRO 500HD / PRO 340HD / PRO 330HD / SH-726E / SH-736HD




FOR PRO 740DX / PRO 700DX / PRO 740BHX / PRO 700BHX / PRO 550BHX / PRO 824CBH / SBH-808DQ / PRO 700DX HEAD




FOR PRO 550DX / PRO 500DX / PRO 400DX / PRO 340DX / PRO 330DX / ABL 300DX / SH-705E / ABL 300DX HEAD



FOR 505QF / 505QF HEAD




FOR PRO 724CBH / PRO 634CBH / PRO 500BHX / PRO 340BHX / PBH-525DS / PBH-425DS LITE-CF522 / LITE-CF422



FOR LITE AL-420 .M.S / SPRINT PRO II / SPRINT MINI II / MINI-PRO DQ / LIGHTY POD DQ / SBH-100DQ / DQ-10



FOR PRO 340BH / PRO 330AF / PRO 330EZ / SPRINT PRO EZ / SPRINT PRO II 3WAY / SPRINT 150 / SH-704E / SH-707E / AF1100E / SBH-150DQ / SBH-200DQ / DQ-20




FOR 511QF / E-Z POD / E-Z POD Jr. / VIDEO SPRINT



FOR ZF-400 / ZF-300



FOR BALANCE PRO / 515QF



FOR 88MB / 444-Sport / 35DN

SPIKE SET

Exchangeable leg tip set for outdoor use for PRO 900, 800, 700 series Carbon Fiber Tripods



11mm THREADED ADAPTER

11mm Thread Adapter is an adapter that converts 3/8 "screw holes into 1/4". Or it converts 1/4" screw to 3/8".



A variety of shooting that can be what you use a tripod.

Be take using the camera on a tripod to release the camera from the “Shaking”, it increases the likelihood of further representation. Here we introduce the sense to use a tripod.



Commemorative photo

Without asking the people around, the photographer goes to the photograph, a tripod is essential. The tripod set can be quickly comfortable, it is useful.



Shooting of the river flow

You can represent the “Flow” of the river by taking a river in slow shutter speed. In addition, if the shooting by changing the shutter speed remains the same composition, you can also choose a more image as representation.



Fireworks shooting

To shoot the fireworks, you need to use a slow shutter. In addition, a tripod is required also in the sense of waiting for the chance to predetermine the composition “Chance waiting”.



Shooting of flowers

In the shooting of flowers of close-up, because the magnification is when the depth of field becomes shallow high, the determination of the composition, delicate focusing will be difficult. In addition, it will be slow shutter speed in order to narrow down the deeply take the depth of field. Either by utilizing a tripod, you can shoot remains of feelings.

How to choose a tripod

“Classification” of the tripod can be determined by the maximum pipe diameter of the legs. The tripod of the class, will introduce an example of equipment that can be place stably. Tripod that corresponds to the D-SLR camera + 70-200mm F2.8 class is a medium-sized tripod of “Pipe diameter around 28mm”. Then, D-SLR camera + Double zoom lenses is a small-sized tripod of “Pipe diameter around 24mm”.

Pipe diameter 20mm	Travel type tripod for Mirror-less cameras and high-class compact cameras.
Pipe diameter 24mm	Small type tripod for standard zoom, light telescope lens (up to 200mm)
Pipe diameter 28mm	Medium size tripod for 70-200mm F2.8, 70-300mm, etc.
Pipe diameter 32mm	Large size tripod for large-aperture super-telephoto lens 300mm F2.8, etc.
Pipe diameter 38mm	Ultra-large tripod for super telephoto lens with more than 600mm, for studio, etc.


“Maximum loaded weight” of the tripod

SLIK has decided to “Maximum loaded weight” (*) in order to use your tripod safely, we regularly review it. It is a numerical value that is determined in order to prevent an accident such as a fall, but do not prevent the occurrence of a blur even in the case of mounting the equipment in this number. For the matching of the tripod and the mounting equipment, you should determine the pipe diameter to the reference.

(*) It is not simple notation of “Load capacity” that is not take into account the risk only at the maximum weight.

Determined by the height of the tripod “Angle”

There is a “Angle” – one of the important points when you take a picture. For example, when shooting a sunflower which extends to the height of the eyes, and set up the height of the eye housing, such as “Sample images A” may visible on captured background. In the “Sample images B”, by setting a tripod at lower position with looking up at the Sunflower from “Low Angle”, it was the background of the sky. “Sample images C”, the camera installed in a high place on a large-size tripod, by taking from the “High Angle”, we put the green in the background.



▲Sample image A



▲Sample image B




▲Sample image C

If the tripod height can be set higher, you can shoot Sample Images A to C. But it is limited to an angle that can be taken with the medium and small sized tripods.

“Low position shooting” for the close-up of the flower.

There is a “Flower pictures” to the popular shooting genre. “The multi-position type” tripod that can set the tripod to a lower position is useful for the shooting of the flowers. Depending on the models, there are – “the type that can be set as it is in the low position”, “the type to replace the standard of the center column to an optional shorter center column”, “the type that corresponds to the low position by dividing the center column”, etc.

In addition, mounting the center column upside-down (Photo-1), or installing a “Clamp Head” in the leg pipe, you can set your camera to a lower position.



At the low position using a short center column



Mounting the center column upside-down (Photo-1)



Using a clamp head (Photo-2) ~ see page No. 23

Choose the “Head” according to your shooting purpose.

SLIK offers all kinds of heads for a variety of shooting applications.

3-way Pan Head

It is suitable for landscape and still photography. It is characterized by determined the composition carefully. It has been equipped to many of tripods as standard.



SH-807E

Multi-position Head

SLIK was developed in the 1960s. Suitable for shooting of “Moving things” such as sports, wild animals, wild bird shooting, etc.



SH-707E

Ball Head

It can be taken in the sense of close to hold by hand. The most problem in using tripod “Determining the composition” can be done as you want.



PBH-535AS

Trigger Type Head

Free to move and hold the grip and this is a revolutionary trigger type ball head to fix you release. You can use this head of up to 3kg in the sense of “Hand-held feeling”.



AF2100 (PAT.)

Model	Folded length (mm)	Max. operating height(mm)	Max.center column ext.(mm)	Weight (g)	Max Load weight (kg)	Bubble level	Center column type	Multi position	Leg lock type *	leg tip	How to mount camera **	Page
GRAND PRO CF-4 (LEG)	825	2,540	285	3,800	14	—	worm gear	○	T.L.	2WAY	—	04
PRO 924CF (LEG)	554	1,790	310	2,310	10	—	rack & pinion	○	T.L.	RUBBER	—	04
PRO 923CF (LEG)	708	1,900	310	2,320	10	—	rack & pinion	○	T.L.	RUBBER	—	04
PRO CF-834 (LEG)	480	1,650	325	1,560	7	—	invertible center column	○	T.L.	RUBBER	—	05
PRO CF-834BH6	566	1,752	325	2,040	6	single	invertible center column	○	T.L.	RUBBER	Q.R.S.	07
PRO CF-833 (LEG)	600	1,710	325	1,550	7	—	invertible center column	○	T.L.	RUBBER	—	05
PRO CF-833BH6	686	1,812	325	2,030	6	single	invertible center column	○	T.L.	RUBBER	Q.R.S.	07
PRO CF-734 (LEG)	475	1,650	325	1,350	5	—	invertible center column	○	T.L.	RUBBER	—	06
PRO CF-734BH5	557	1,747	325	1,730	5	single	invertible center column	○	T.L.	RUBBER	Q.R.S.	07
PRO CF-733 (LEG)	575	1,675	355	1,330	5	—	invertible center column	○	T.L.	RUBBER	—	06
PRO CF-733BH5	657	1,772	355	1,710	5	single	invertible center column	○	T.L.	RUBBER	Q.R.S.	07
PRO CF-634 (LEG)	457	1,590	280	930	3	—	invertible center column	○	T.L.	RUBBER	—	06
PRO CF-633 (LEG)	540	1,630	390	900	3	—	invertible center column	○	T.L.	RUBBER	—	06
PRO CF-635 (LEG)	370	1,310	190	870	3	—	invertible center column	○	T.L.	RUBBER	—	06
LITE CF-522	370	1,466	249	1,113	3	—	invertible center column	○	T.L.	RUBBER	Q.R.S.	08
LITE CF-422	473	1,782	355	1,178	3	—	invertible center column	○	T.L.	RUBBER	Q.R.S.	08
LITE AL-420	428	1,534	225	1,015	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	08
LITE AL-420M	358	1,241	171	930	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	08
LITE AL-420S	310	1,014	124	785	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	08
THE PROFESSIONAL 4	935	2,530	280	6,810	12	dual axis	worm gear	○	T.L.	RUBBER	D.A.L.	09
THE PROFESSIONAL	900	2,000	280	6,210	12	dual axis	worm gear	○	T.L.	RUBBER	D.A.L.	09
PROFESSIONAL II -LE	810	1,835	285	4,810	10	dual axis	worm gear	○	T.L.	RUBBER	D.A.L.	09
PRO 700DX	760	1,900	380	3,670	8	dual axis	invertible center column	○	L.L.	RUBBER	Q.R.S.	10
PRO 700BH6	766	1,882	380	3,150	6	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	10
PRO 500DX	695	1,645	260	2,730	6	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	10
PRO 500BH5	707	1,642	260	2,460	5	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	10
PRO 330DX	600	1,592	350	1,705	3	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	11
PRO 340DX	490	1,440	290	1,625	3	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	11
PRO 340BH	515	1,437	290	1,525	3	dual axis	invertible center column	○	L.L.	RUBBER	Q.R.S.	11
PRO 340BH5	507	1,447	290	1,540	3	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	11
PRO 330AF	660	1,627	350	1,795	1.5	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	11
PRO 400DX	650	1,535	265	2,520	5	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	11
ABLE 300DX	655	1,550	265	2,600	5	—	invertible center column	○	T.L.	RUBBER	Q.R.S.	11
PRO 500 HDII	710	1,650	260	2,730	5	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	12
PRO 340 HDII	507	1,455	290	1,810	3	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	12
PRO 330 HDII	615	1,607	350	1,905	3	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	12
MASTER CLASSIC	650	1,630	135	2,550	6	—	rack & pinion	×	T.L.	RUBBER	D.A.L.	12
PRO 330EZ	600	1,583	350	1,725	3	dual axis	invertible center column	○	L.L.	RUBBER	Q.R.S.	12
SPRINT PRO III EZ	485	1,605	300	1,360	2	dual axis	invertible center column	○	L.L.	RUBBER	Q.R.S.	12
SPRINT PRO III 3WAY GM-BK	475	1,605	300	1,180	2	single	invertible center column	○	L.L.	RUBBER	Q.R.S.	13
SPRINT PRO III BH GM-BK	470	1,598	300	1,020	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	13
SPRINT MINI III GM-BK	335	1,078	210	860	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	13
VIDEO SPRINT III	480	1,600	300	1,140	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	13
U 9000	590	1,500	300	1,600	2	single	rack & pinion	×	L.L.	2WAY	Q.R.S.	14
U 8000	590	1,500	300	1,500	2	—	rack & pinion	×	L.L.	RUBBER	Q.R.S.	14
U 874	500	1,500	260	1,270	1.5	single	rack & pinion	×	L.L.	RUBBER	Q.R.S.	14
U 873	553	1,500	323	1,260	1.5	single	rack & pinion	×	L.L.	RUBBER	Q.R.S.	14
COMPACT 8	365	1,035	186	615	1	—	center column	×	L.L.	RUBBER	S.A.L.	14
MINI-PRO 7	195	450	15	540	2	dual axis	center column	○	L.L.	RUBBER	Q.R.S.	14
MINI-PRO DQ	205	226	45	350	1	—	center column	×	T.L.	RUBBER	Q.R.S.	14
MINI-PRO V	200	218	45	345	1	—	center column	×	T.L.	RUBBER	S.A.L.	14
MINI 8	205	210	46	300	1	—	center column	×	L.L.	RUBBER	S.A.L.	14
MÉMOIRE MINI T2 BK-RD-GR-WH	138	52	—	125	2	—	—	×	—	—	S.A.L.	14
505QF	750	1,640	280	3,600	5	single	rack & pinion	×	T.L.	RUBBER	Q.R.S.	15
504QF II	690	1,560	265	2,570	3	single	invertible center column	○	T.L.	RUBBER	Q.R.S.	15
PRO 330 Video	620	1,612	350	1,755	3	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	15
VIDEO SPRINT III	480	1,600	300	1,140	2	—	invertible center column	○	L.L.	RUBBER	Q.R.S.	15

* L.L. MEANS LEVER LOCK SYSTEM
T.L. MEANS TWIST LOCK SYSTEM

** D.A.L. MEANS “DOUBLE ACTION LOCKING SYSTEM”
S.A.L. MEANS “SINGLE ACTION LOCKING SYSTEM”
Q.R.S. MEANS “QUICK RELEASE SHOE SYSTEM”

SLIK®

Designed and engineered in Japan



SLIK CORPORATION

853 Kayama, Hidaka City,
Saitama 350-1231, Japan

Phone. 81-42-989-0990

Fax.81-42-989-2444



Slik Corporation reserves the right to make changes in
design and / or improvements on the products without
any obligation and advanced notice.

© COPYRIGHT 2009 SLIK CORPORATION.

ALL RIGHTS RESERVED. 18/9 J1,500.