

SLIK® AF1500AC

Operating Instructions

Thank you very much for choosing SLIK product. SLIK Corporation has designed a sturdy, rugged, dependable product that will provide you with many years of satisfactory use. Please take a few moments to read this operating instruction manual carefully before use to take full advantage of the many fine features. Retain this operating instruction manual in case you might want to refer back to it.

⚠ Caution

This caution icon refers to information pertaining to important safety procedures in preventing injuries, or damages which may occur as a result of mishandling this product.

🚫 Prohibition



This prohibition icon refers to information pertaining to prohibited contents. Please refer to instruction closely to avoid accidents.

Specification

Height	130 mm (5.2 in)
Weight	550 g (1.21 lbs)
Camera mounting screw	U1/4"
Tripod mounting screw	U1/4" &/or U3/8"

W913

Components

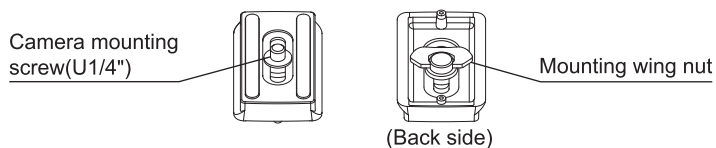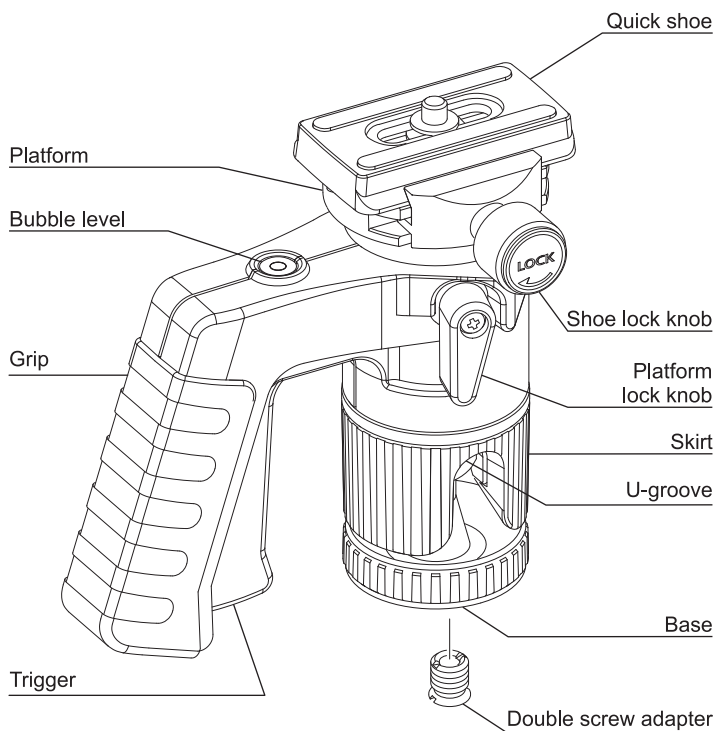


⚠ Caution

※Bubble level on the tripod is a rough criterion. It's not so accurate as a level on a camera.

Carrying the monopod


🚫 Prohibited

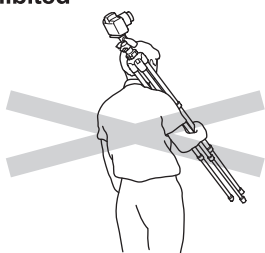

Carrying a tripod with camera attached can lead to unexpected accidents. For this reason, we recommend you to remove your camera while carrying the tripod.

Setting up


⚠ Caution

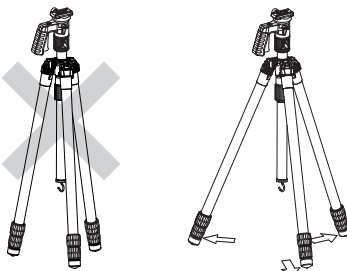

To prevent accidental equipment fall or tripod tipping over, make sure all levers, knobs and handles on the tripod are securely tightened. And all of the three legs are opened all the way.

Optional accessory

6507 Quick release shoe
Cat. No. 618-822

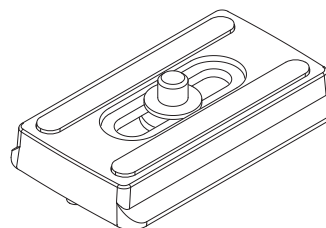

Equipment that can be loaded on this product


🚫 Prohibited

Maximum loading capacity : 4 kgs (8.8 lbs)

Do not overload.


This product has been designed to handle equipment weighing under the maximum load capacity. Some equipment weighing under the maximum load capacity may not balance well due to its weight distribution. Use a larger monopod or head in such case.

Bubble level

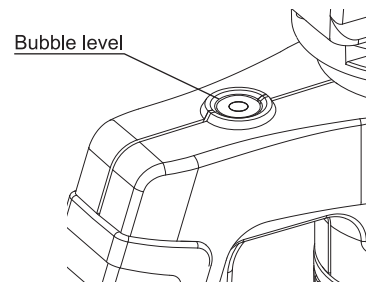


Adjust the level so that the bubble is inside of the marked circle.

Attaching the head to the center column

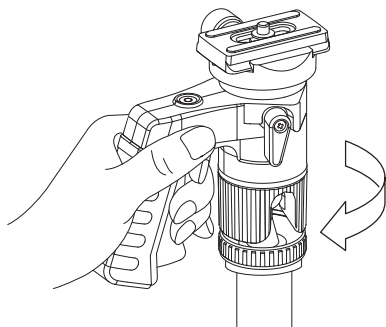



Hold the base with one hand and pull the trigger with the other hand. Attach the base to center column mounting screw of the tripod. And rotate it clockwise to lock in position. Release the trigger and tighten the base securely.

Removing the head from the center column

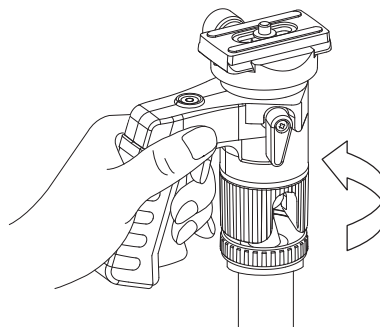


With your hands off the trigger, turn the head forcefully counterclockwise to loosen the head. Squeeze the grip & trigger and turn the head counterclockwise to remove the head.


Attaching the camera to the quick release shoe

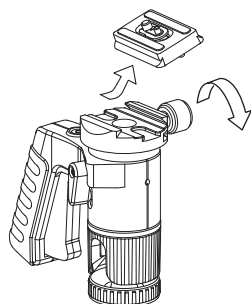

(Back side)



⚠ Caution


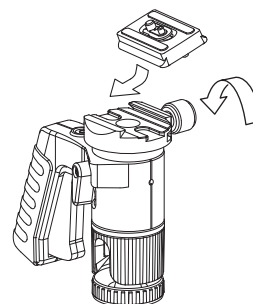


To remove the quick release shoe, loosen the shoe lock knob until the quick release shoe can be removed from the platform.

Attach the quick release shoe mounting screw to the camera mount and secure firmly using the mounting wing nut.


Tighten the shoe lock knob firmly after inserting the quick release shoe to the platform. Please make sure the equipment is securely fixed to the pan head, before you use the pan head.

Using the pan head

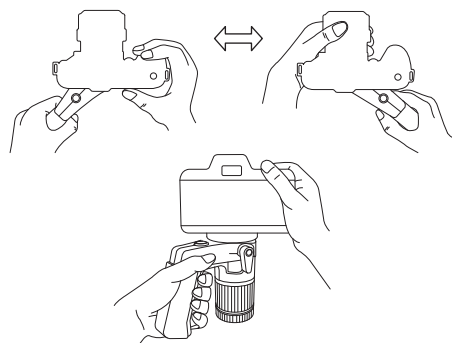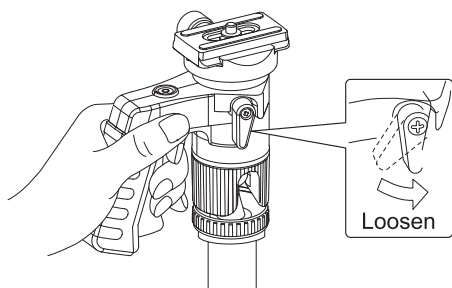

Loosen the camera base lock lever in the direction of the arrow to rotate the camera base. Pull the trigger to move the head freely. Release the trigger to lock the head in place.


The camera platform rotates, allowing you to freely choose the position of the grip. Once the position is determined. Lock the camera platform using the platform lock knob.

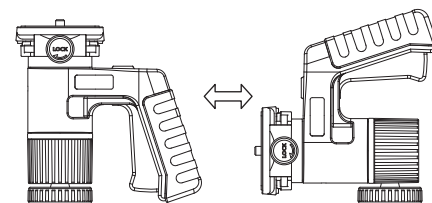

The ball head can be inclined up to 90 degrees in the direction of the U-groove on the skirt. You can get any angles if you use the rotation of the skirt and the camera platform.

Care of the Tripod

- DO NOT apply any grease or oil to this product.
- Clean with a mild detergent and a soft cloth only.
- DO NOT use close to fire. Avoid extreme heat.

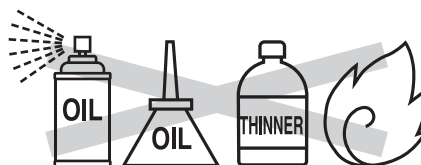

Slik corporation reserves the right to make changes in design and/or improvements on the products without any obligation and advanced notice.